

JOB NAME: \_\_\_\_\_


DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_



**DIMENSIONS:**

5.7"(H) x 3.15"(D)

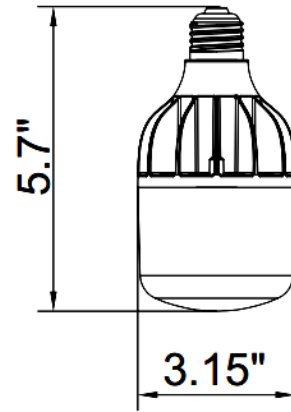

**HPL-16W-50K-E26**  
**HPL-16W-30K-E26**

**LED HIGH POWER LAMPS**

Ideal for retrofitting existing HID high bay, it can be used in enclosed luminaires

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120-277VAC 50/60Hz
- Wattage: 16W
- Power factor: >0.90
- Efficacy: 125LM/W
- THD: 25%

**HOUSING SPECIFICATIONS:**

- Plastic Housing
- No fan housing (New Technology)
- Lamp base: E26 Mogul Base
- Operating temperature: -4°F ~ 122°F
- Lifespan: 50,000 hrs.
- IP rating: suitable for damp location

**CERTIFICATIONS: UL**



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
HPL-16W-50K-E39	16W	120~277VAC	2000LM	5000K
HPL-16W-30K-E39	16W	120~277VAC	2000LM	3000K

**LIGHTING SPECIFICATIONS:**

- Lens: PC Lens
- Total lumens: 2000LM
- Color temperature: 5000K/3000K
- Color rendering index: >80
- Beam Angle: 200°

**WARRANTY: 5 years**

