

SSLRB SERIES RESIDENTIAL LIGHTING


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

SSLRB4-MCT5
LED ULTRA SLIM RECESSED LIGHT

Customer Name: _____

Project Name: _____

Note: _____ Type: _____

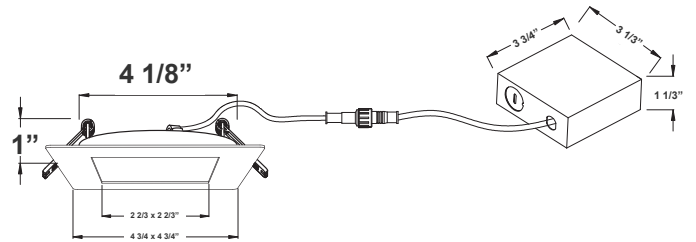

1"(H) x 4 1/8"(W)

LED Ultra Slim Recessed Lights which are Ideal for New as Well as Old Residential and Commercial Constructions.

Features

- Optics: White Translucent Acrylic
- Die-Cast Aluminum With Powder Coat Finish
- 5-Year Warranty
- Junction Box Included With Fixture

Technical Specifications

Electrical:

- Voltage: 120V
- Wattage: 9W
- Power Factor: >0.9
- Efficacy: 70 LPW

Mechanical:

- Die-Cast Aluminum With White Powder Coat Finish
- Junction Box Included With Fixture
- Junction Box thickness: 1-3/8"
- Cut-out Hole Diameter: 3.98"
- 24" DC cord from driver box to fixture
- Operating Temperature: -4°F to 104°F
- Recessed Mounting
- 5-Year Warranty
- Suitable for Damp location

Lighting:

- Multi Color Temperature Switch is in the box
- Dimming: TRIAC Dimmable
- Optics: White Translucent Acrylic
- Total Lumens: 630LM
- Color Temperatures: 2700K, 3000K, 3500K, 4000K, 5000K
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 Hrs
- Beam Angle: 110°

Applications:

- LED Ultra Slim Recessed Lights which are Ideal for New as Well as Old Residential and Commercial Constructions.

Other Models:

- 15W | 1125LM | SSLRB6-MCT5





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-Z9-Z9-ZZ

Photometrics: SSLRB4-MCT5

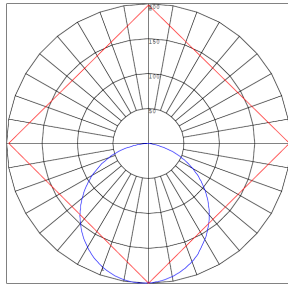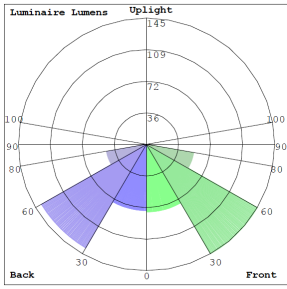

BUG Rating: B1-U1-G0

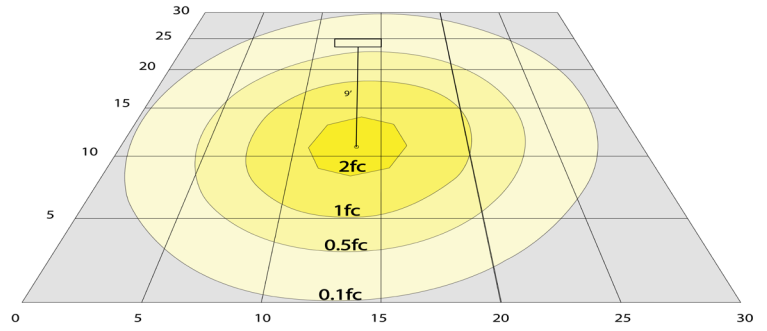

Area 30'x 30' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: SSLRB4-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SSLRB4-MCT5	9W	120V	630LM	2700K 3000K 3500K 4000K 5000K	B1-U1-G0	70

Sample Ordering

Model Color Temp.

SSLRB4 = MCT5

Accessories:

Blank = No Option For Accessories

SSL4-RI = 4" Square Rough-in Plate, 26" Long

SSLRB4-TRM-BK = 4 INCH SQUARE TRIM FOR SSLRB4 BLACK

SSLRB4-TRM-BN = 4 INCH SQUARE TRIM FOR SSLRB4 BRUSHED NICKEL

SSLRB4-TRM-ORB = 4 INCH SQUARE TRIM FOR SSLRB4 OIL-RUBBED BRONZE


ACCESSORIES:




SSL4-RI
26" x 4"



SSLRB4-TRM-BK



SSLRB4-TRM-BN



SSLRB4-TRM-ORB

Example:

1. SSLRB4-MCT5

(FOR SSLRB4 9W MCT5 FIXTURE 120V)

2. SSLRB4-MCT5

(FOR SSLRB4 9W MCT5 FIXTURE 120V)

SSL4-RI

(4" Square Rough-in Plate, 26" Long)

